




PLAYGROUND FENCE AND PEDESTRIAN GATE

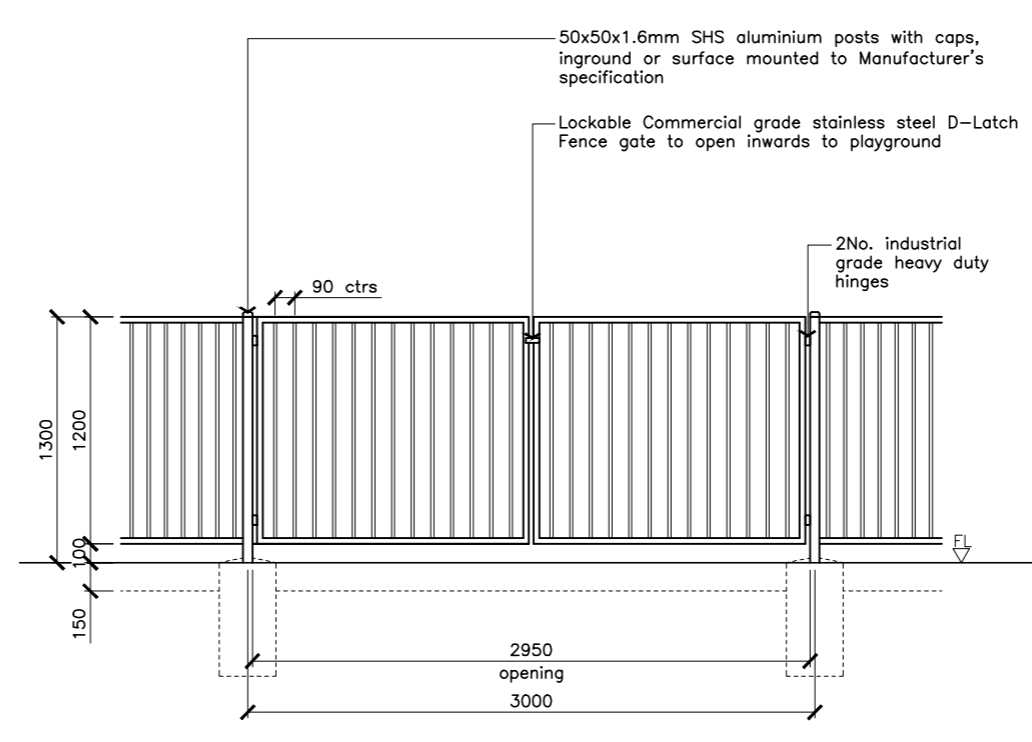

PLAYGROUND FENCE MAINTENANCE GATE

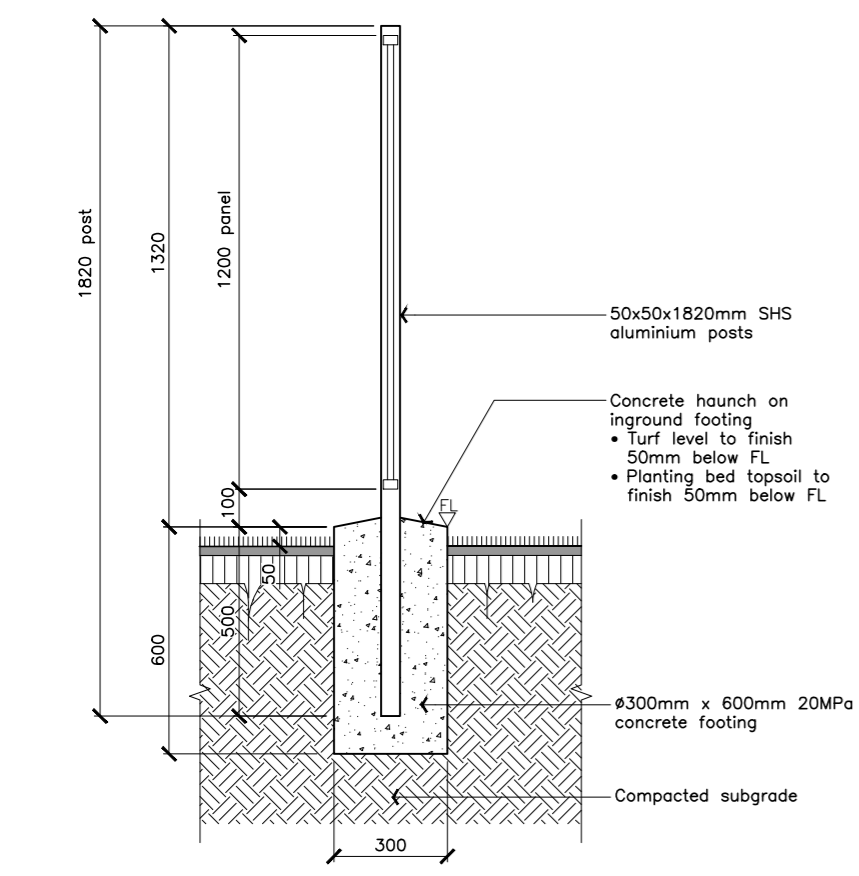

IN-GROUND FOOTING DETAIL

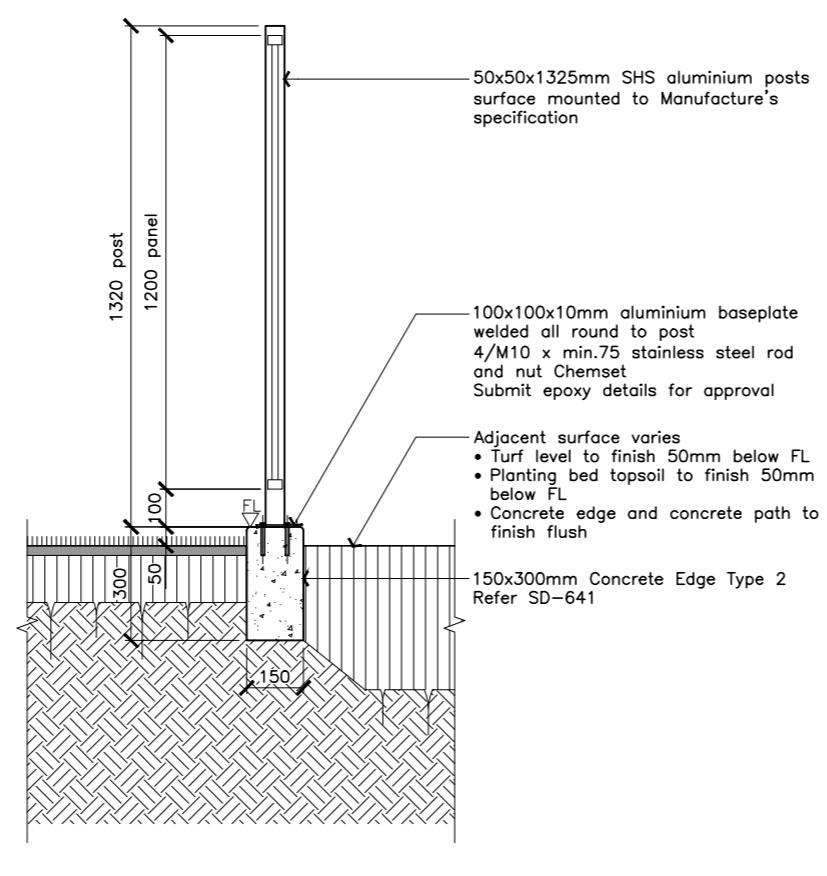

BASEPLATE DETAIL



PLAYGROUND FENCE

NOTES

GENERAL

- All dimensions are in millimetres, unless otherwise noted.
- Do not scale these drawings. Use figured dimensions.
- The Contractor shall check, verify on site and be responsible for the correctness of all dimensions shown on the drawings and discrepancies shall be reported immediately to the Project Manager before any work proceeds.
- These drawings shall be read in conjunction with all other drawings and specifications and with such other written instructions as may be issued during the course of construction. All discrepancies shall be reported immediately for decision before proceeding with the project.
- All workmanship and materials shall be in accordance with the requirements of the Landscape Policy and Construction Standards, Standards Australia Codes and the by-laws and ordinances of the relevant authorities.
- During construction any structure and neighbouring structures shall be maintained in a stable condition, ensuring no parts are overstressed.
- The contractor is to confirm the location and depth of services within the construction limits prior to commencement of construction. Services to be noted on As Constructed drawings.
- It is the contractors responsibility to ensure that the project is carried out in accordance with the drawings and specifications.

CITY PLAN REFERENCES

Part 9.3.3	Landscape Code
SC6.4.12.1	Policy Intent
SC6.4.23	Construction Management
SC6.4.23.1	Construction (Protection of Trees and Vegetation)
SC6.4.10.3	Construction Standards
SC6.4.18	Concrete Works
SC6.4.6.17	Control of Traffic

PLAYGROUND FENCING

- Use and location of this fence type to be submitted for approval.
- Generally, playspaces are not to be fenced. Play spaces adjacent high traffic volume roads or in destination parks may be fenced.
- Exact locations and alignment shall be confirmed on site with Townsville City Council Project Manager.
- Fence footings within dripline of tree canopy shall be excavated by hydrovac/by hand. Refer City Plan SC6.4.23.1 Construction (Protection of Trees and Vegetation)
- Fence to be installed strictly in accordance with manufacturer's installation guidelines.
- Fence Type:
 - Posts: 50mm sq. aluminium
 - Fence panels: 1200x1500mm (HxW) aluminium pool type
 - Pedestrian Gate: 1200x1000mm (HxW) aluminium commercial, self closing
 - Vehicular Gate: 1200x3000mm (HxW) aluminium, lockable
- Supply all fittings and fixtures, including powder-coated panels, 2 part epoxy painted support brackets, commercial grade hinges and D-latch, stainless steel fixings, caps, etc.
- On sloping grade the panels are to be installed with a step between panels with a gap above ground level of minimum 90mm and maximum 150mm.

COLOUR SCHEDULE

ITEM	FINISH
Fence	Powdercoat or 2 part epoxy (2 coats)
Brackets and baseplate	2 part epoxy (1 coat)
Fence Colour	Black Satin

No.	DATE	DESCRIPTION	AP'D
B	27/07/2023	CITY PLAN REFERENCE UPDATE	PM
A		ORIGINAL ISSUE	
REVISIONS			

NOTES :
 REFERENCE DRAWINGS
 SD-641 - Surface Treatment Edging

Full Size A1
 Not to scale

DRAWN: DESIGN OFFICE
 CHECKED: HB
 Senior Open Space Planner Approved:
 Date: Jun 14, 2024
 Team Manager EAIP Approved:
 Date: Jun 14, 2024



**FENCING
 PLAYGROUND**

**STANDARD
 DRAWING
 OPEN SPACE**
 SD-652 B